

40  
40

HW 3. CEE 247. Structural Dynamics. UCI. Fall 2006

Nasser Abbasi

October 31, 2006

## **Contents**

<b>1 Formulas used</b>	<b>2</b>
<b>2 Problem 4.3</b>	<b>3</b>
<b>3 Problem 4.5</b>	<b>7</b>
<b>4 Problem 4.6</b>	<b>10</b>
<b>5 Problem 4.14</b>	<b>12</b>

# 1 Formulas used

10  
10

Integration by parts is used in many problems below to solve  $\int_a^b \tau \sin \omega_n(t-\tau) d\tau$ . I derive it once.

Let  $u = \tau$  and  $dv = \sin \omega_n(t-\tau)$  hence  $du = 1$  and  $v = \int \sin \omega_n(t-\tau) d\tau = \frac{\cos \omega_n(t-\tau)}{\omega_n}$

Hence

$$\begin{aligned}\int_a^b \tau \sin(t-\tau) d\tau &\equiv \int u dv \\&= uv - \int v du \\&= \left[ \tau \frac{\cos \omega_n(t-\tau)}{\omega_n} \right]_a^b - \frac{1}{\omega_n} \int_a^b \cos \omega_n(t-\tau) d\tau \\&= \frac{1}{\omega_n} [\tau \cos \omega_n(t-\tau)]_a^b - \frac{1}{\omega_n} \left[ \frac{\sin \omega_n(t-\tau)}{-\omega_n} \right]_a^b \\&= \frac{1}{\omega_n} [\tau \cos \omega_n(t-\tau)]_a^b + \frac{1}{\omega_n^2} [\sin \omega_n(t-\tau)]_a^b\end{aligned}$$

Hence the integral  $I$  becomes

$$\boxed{\int_a^b \tau \sin(t-\tau) d\tau = \frac{1}{\omega_n^2} [\tau \omega \cos \omega_n(t-\tau) + \sin \omega_n(t-\tau)]_a^b}$$

The above is the form to remember.

or

$$I = \frac{1}{\omega_n} [b \cos \omega_n(t-b) - a \cos \omega_n(t-a)] + \frac{1}{\omega_n^2} [\sin \omega_n(t-b) - \sin \omega_n(t-a)]$$


For example, when  $a = 0, b = t$ , we obtain

$$\int_0^t \tau \sin \omega_n(t-\tau) d\tau = \frac{t}{\omega_n} - \frac{\sin \omega_n t}{\omega_n^2}$$

## 2 Problem 4.3

### Problem 4.3



The steel frame shown in Fig. P4.3 is subjected to a horizontal force  $F(t)$  applied at the girder level. The force decreases linearly from 5 kip at time  $t = 0$  to zero at  $t = 0.6$  sec. Determine: (a) the horizontal deflection at  $t = 0.5$  sec and (b) the maximum horizontal deflection. Assume the columns massless and the girder rigid. Neglect damping.

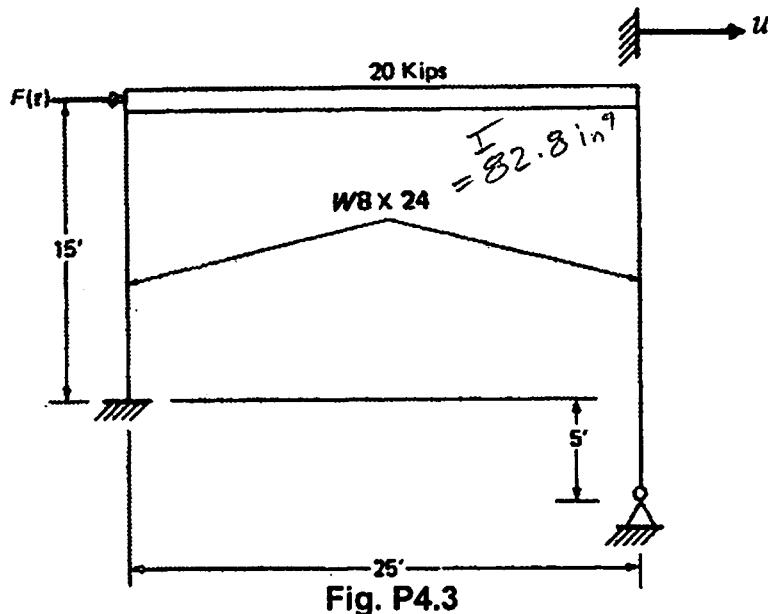

### Solution

We first assume that the initial absolute state of the girder is  $u(0) = 0$ , and  $\dot{u}(0) = 0$


This is the force load diagram

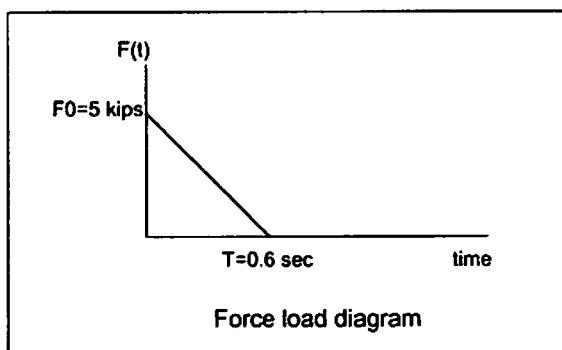

The intercept is  $F_0$  and the slope is  $-\frac{F_0}{t_d}$  hence since the general line equation for  $y(x)$  is  $y = \text{intercept} + \text{slope} * x$ , we see that the equation for force loading is

$$F(t) = F_0 - \frac{F_0}{t_d}t = F_0 \left(1 - \frac{t}{t_d}\right) \quad (1)$$

First we draw the physical model diagram

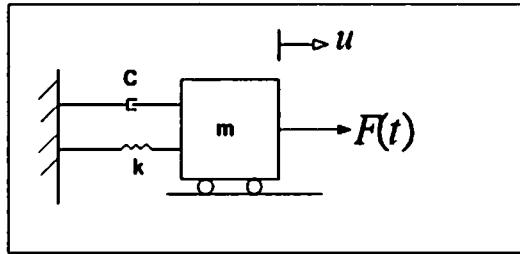

Using Duhamel integral, the displacement  $u(t)$  is (using the assumption of no damping)

$$u(t) = \frac{1}{m\omega_n} \int_0^t F(\tau) \sin \omega_n(t-\tau) d\tau$$

Substitute (1) into the above and carry the integration.

$$\begin{aligned} u(t) &= \frac{F_0}{m\omega_n} \int_0^t \left(1 - \frac{\tau}{t_d}\right) \sin \omega_n(t-\tau) d\tau \\ &= \frac{F_0}{m\omega_n} \int_0^t \sin \omega_n(t-\tau) d\tau - \frac{F_0}{m\omega_n t_d} \overbrace{\int_0^t \tau \sin \omega_n(t-\tau) d\tau}^{\text{by parts}} \\ &= \frac{F_0}{m\omega_n^2} (\cos \omega_n(t-\tau))_0^t - \frac{F_0}{m\omega_n t_d} \left( \frac{1}{\omega_n^2} [\tau \omega \cos \omega_n(t-\tau) + \sin \omega_n(t-\tau)]_0^t \right) \\ &= \frac{F_0}{m\omega_n^2} (1 - \cos \omega_n t) - \frac{F_0}{m\omega_n^3 t_d} (\tau \omega - \sin \omega_n t) \\ &= \frac{F_0}{m\omega_n^2} (1 - \cos \omega_n t) + \frac{F_0}{m\omega_n^2 t_d} \left( \frac{\sin \omega_n t}{\omega_n} - t \right) \end{aligned}$$

But  $\omega_n^2 = \frac{k}{m}$  hence the above becomes

$$u(t) = \frac{F_0}{k} (1 - \cos \omega_n t) + \frac{F_0}{k t_d} \left( \frac{\sin \omega_n t}{\omega_n} - t \right) \quad (2)$$

Now to find the stiffness  $k$ :

$$\begin{aligned}
k &= \frac{12EI}{L_{left}^3} + \frac{3EI}{L_{right}^3} \\
&= 3EI \left( \frac{4}{(15 \times 12)^3} + \frac{1}{(20 \times 12)^3} \right) \\
&= 3 \times 30 \times 10^6 \times 82.8 \left( \frac{4}{(15 \times 12)^3} + \frac{1}{(20 \times 12)^3} \right) \\
&= \boxed{5650.2 \text{ lb/in}}
\end{aligned}$$

Hence

$$\begin{aligned}
\omega_n &= \sqrt{\frac{k}{m}} \\
&= \sqrt{\frac{5650.2 \times 386}{20 \times 10^3}} \\
&= \boxed{10.443 \text{ rad/sec}}
\end{aligned}$$

Now substitute the above results for  $k$  and  $\omega_n$  in equation (2), and evaluate at  $t = 0.5$  we obtain

$$\begin{aligned}
u(t) &= \frac{F_0}{k} (1 - \cos \omega_n t) + \frac{F_0}{k t_d} \left( \frac{\sin \omega_n t}{\omega_n} - t \right) \\
&= \frac{5 \times 10^3}{5650.2} (1 - \cos (10.443 \times 0.5)) + \frac{5 \times 10^3}{5650.2 \times 0.6} \left( \frac{\sin (10.443 \times 0.5)}{10.443} - 0.5 \right) \\
&= \boxed{-0.40715 \text{ inch}}
\end{aligned}$$

part(b)

To find maximum displacement  $u_{max}(t)$  we use the response spectrum shown on page 107 of the 5th edition of the text book. First we find the natural period  $T$ .

$$\begin{aligned}
T &= \frac{2\pi}{\omega_n} = \frac{2\pi}{10.443} \\
&= \boxed{0.60166 \text{ sec}}
\end{aligned}$$

Hence

$$\begin{aligned}
\frac{t_d}{T} &= \frac{0.6}{0.60166} \\
&= \boxed{0.99724}
\end{aligned}$$

Hence from the spectrum on page 107, we see that

$$DLF_{max} = 1.55$$

approximately

But

$$DLF_{\max} = \frac{u_{\max}}{u_{st}} = \frac{u_{\max}}{\frac{F_0}{k}}$$

Hence


$$\begin{aligned} u_{\max} &= DLF_{\max} \left( \frac{F_0}{k} \right) \\ &= 1.55 \left( \frac{5 \times 10^3}{5650.2} \right) \\ &= \boxed{1.3716 \text{ inch}} \end{aligned}$$

This is a small program to plot  $u(t)$  itself. We see that  $u(t)$  became maximum before  $t_d$ .  $u(t)$  maximum as at about  $t = 0.25$  sec

```

Remove("Global") ;
(* verification code for problem 4.3, ODE 477. By Nasser Abbasi *)
m = 20*10^-3 ; k = 5650.2; td = 0.6; f0 = 5*10^3;
f[t_] := Piecewise[{{(0, t < 0), (f0*(1 - t/td), 0 <= t < td), (0, t > td)}]
Plot(f[t], {t, 0, 2}, PlotLabel -> "F(t) for problem 4.3", PlotLabel -> {"t", "F(t)"})
sol = Flatten@NDSolve[{mu'[t] + k u[t] == f[t], u[0] == 0, u'[0] == 0}, u[t], {t, 0, 4}]
Plot[u[t] /. sol, {t, 0, 4}, PlotLabel -> "u(t) for problem 4.3", PlotLabel -> {"t", "u(t)"}]

```

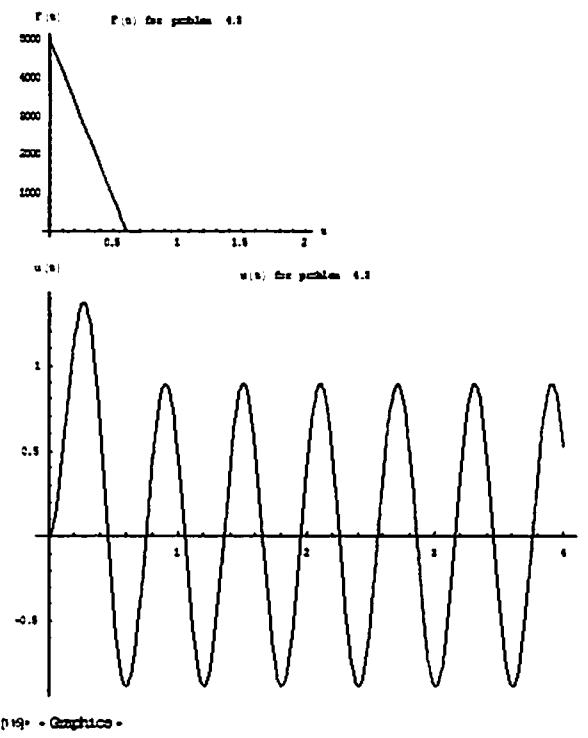

Output - Graphics -

Great!

### 3 Problem 4.5


10  
10

#### Problem 4.5

For the load-time function in Fig. P4.5, derive the expression for the dynamic load factor for the undamped simple oscillator as a function of  $t$ ,  $\omega$ , and  $t_d$ .

solution

fig P4.5 is

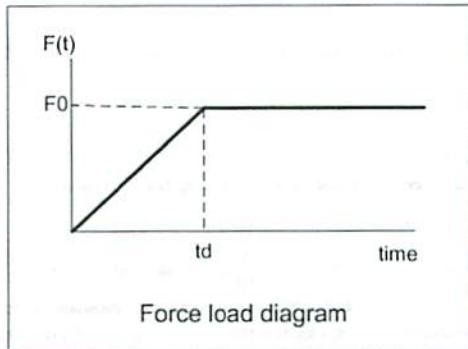

$$DLF = \frac{u(t)}{u_{st}}$$

Hence we need to find  $u(t)$

For  $t \leq t_d$  and for an undamped simple oscillator, using Duhamel integral, the displacement  $u(t)$  is

$$\begin{aligned} u(t) &= \frac{1}{m\omega_n} \int_0^t F(\tau) \sin \omega_n(t-\tau) d\tau \\ &= \frac{1}{m\omega_n} \int_0^t \frac{F_0}{t_d} \tau \sin \omega_n(t-\tau) d\tau \\ &\quad \text{integrate by parts} \\ &= \frac{F_0}{t_d m \omega_n} \overbrace{\int_0^t \tau \sin \omega_n(t-\tau) d\tau} \\ &= \frac{F_0}{t_d m \omega_n} \left( \frac{1}{\omega_n^2} [\tau \omega \cos \omega_n(t-\tau) + \sin \omega_n(t-\tau)]_0^t \right) \\ &= \frac{F_0}{t_d m \omega_n} \frac{1}{\omega_n^2} (t \omega_n - \sin \omega_n t) \end{aligned}$$

$\omega_n^2 = \frac{k}{m}$  hence the above becomes

$$u(t) = \frac{F_0}{t_d \omega_n} \frac{1}{k} (t \omega_n - \sin \omega_n t)$$

Now we find  $DLF$

$$\begin{aligned} DLF &= \frac{u(t)}{u_{st}} = \frac{u(t)k}{F_0} \\ &= \frac{\frac{F_0}{t_d\omega_n} \frac{1}{k} (t\omega_n - \sin \omega_n t) k}{F_0} \\ &= \frac{t\omega_n - \sin \omega_n t}{t_d\omega_n} \end{aligned}$$

Hence

$$DLF = \frac{t}{t_d} - \frac{\sin \omega_n t}{t_d \omega_n}$$

Now we do the case for  $t \geq t_d$

$$\begin{aligned} u(t) &= \frac{1}{m\omega_n} \int_0^t F(\tau) \sin \omega_n (t - \tau) d\tau \\ &= \frac{1}{m\omega_n} \left( \int_0^{t_d} \frac{F_0}{t_d} \tau \sin \omega_n (t - \tau) d\tau + \int_{t_d}^t F_0 \sin \omega_n (t - \tau) d\tau \right) \\ &= \frac{F_0}{m\omega_n} \left( \overbrace{\frac{1}{t_d} \int_0^{t_d} \tau \sin \omega_n (t - \tau) d\tau}^{\text{integrate by parts}} + \int_{t_d}^t \sin \omega_n (t - \tau) d\tau \right) \\ &= \frac{F_0}{m\omega_n} \left( \frac{1}{t_d} \left\{ \frac{\tau \omega_n \cos \omega_n (t - \tau) + \sin \omega_n (t - \tau)}{\omega_n^2} \right\} \Big|_0^{t_d} + \left\{ \frac{\cos \omega_n (t - \tau)}{\omega_n} \right\} \Big|_{t_d}^t \right) \\ &= \frac{F_0}{m\omega_n^2} \left( \frac{1}{\omega_n t_d} \{ t_d \omega_n \cos \omega_n (t - t_d) + \sin \omega_n (t - t_d) - \sin \omega_n t \} \right) + \\ &\quad \frac{F_0}{m\omega_n^2} \{ \cos \omega_n (t - t_d) - \cos \omega_n (t - t_d) \} \\ &= \frac{F_0}{m\omega_n^2} \left( \cos \omega_n (t - t_d) + \frac{1}{\omega_n t_d} \sin \omega_n (t - t_d) - \frac{1}{\omega_n t_d} \sin \omega_n t \right) + \\ &\quad \frac{F_0}{m\omega_n^2} (1 - \cos \omega_n (t - t_d)) \\ &= \frac{F_0}{m\omega_n^2} \left( 1 + \frac{1}{\omega_n t_d} \sin \omega_n (t - t_d) - \frac{1}{\omega_n t_d} \sin \omega_n t \right) \end{aligned}$$

Hence

$$\begin{aligned} DLF &= \frac{u(t)}{u_{st}} = \frac{u(t)k}{F_0} \\ &= \frac{\frac{F_0}{m\omega_n^2} \left( 1 + \frac{1}{\omega_n t_d} \sin \omega_n (t - t_d) - \frac{1}{\omega_n t_d} \sin \omega_n t \right) k}{F_0} \end{aligned}$$

But  $\omega_n^2 = \frac{k}{m}$  hence the above becomes

$$\begin{aligned} DLF &= 1 + \frac{1}{\omega_n t_d} \sin \omega_n (t - t_d) - \frac{1}{\omega_n t_d} \sin \omega_n t \\ &= \boxed{1 + \frac{1}{\omega_n t_d} (\sin \omega_n (t - t_d) - \sin \omega_n t)} \end{aligned}$$

Notice there is a sign difference with the answer on the back of the book. The back of the book gives

$$DLF = 1 + \frac{1}{\omega_n t_d} (\sin \omega_n t - \sin \omega_n (t + t_d))$$

*The book is wrong!*

I think the answer in the back of the book is wrong. One way to obtain the book answer from my answer is to replace  $t$  by  $-t$ .

*Excellent!*

## 4 Problem 4.6

10  
10

Frame shown in problem 4.3 above is subjected to sudden acceleration of 0.5 g applied to the foundation. Determine the maximum shear force in the columns. Neglect damping.

**solution**

The equation for motion when the system is subjected to ground acceleration can be written as

$$m\ddot{u}_r + ku_r = -m\ddot{u}_g$$

Where  $u_r$  is the relative motion of the girder to the ground, and  $\ddot{u}_g$  is the ground acceleration (absolute). Hence  $-m\ddot{u}_g$  is the effective force  $F_e$

Hence this is the same problem as

$$m\ddot{u}_r + ku_r = F_e$$

which has the solution

$$\begin{aligned} u_r &= \frac{1}{m\omega_n} \int_0^t F_e \sin \omega_n(t-\tau) d\tau \\ &= \frac{F_e}{m\omega_n^2} (\cos \omega_n(t-\tau))_0^t \\ &= \frac{F_e}{k} (1 - \cos \omega_n t) \end{aligned}$$

Hence

$$u_{r \max} = \frac{2F_e}{k}$$

But from problem 4.3, we calculated  $k$  to be 5650.2 lb/in, hence

$$\begin{aligned} u_{r \max} &= \frac{2F_e}{k} \\ &= \frac{2(-m\ddot{u}_g)}{k} \\ &= \frac{-2 \times \frac{20 \times 10^3}{g} \times 0.5 \times g}{5650.2} \\ &= \frac{-20 \times 10^3}{5650.2} \\ &= [-3.5397] \text{ inch} \end{aligned}$$

Now maximum shear is given by  $ku_{\max}$ , hence for the left column we have (I will take absolute value of displacement, since we are only interested in maximum value, the sense of shear is not relevant).

$$\begin{aligned}
 \text{maximum shear} &= \frac{12EI}{L_{left}^3} u_{\max} \\
 &= \frac{12 \times 30 \times 10^6 \times 82.8}{(15 \times 12)^3} \times 3.5397 \\
 &= \boxed{18,092 \text{ lb}}
 \end{aligned}$$

and for the right column

$$\begin{aligned}
 \text{maximum shear} &= \frac{3EI}{L_{right}^3} u_{\max} \\
 &= \frac{3 \times 30 \times 10^6 \times 82.8}{(20 \times 12)^3} \times 3.5397 \\
 &= \boxed{1,908.1 \text{ lb}}
 \end{aligned}$$

## 5 Problem 4.14

14  
C

### Problem 4.14.

For the dynamic system shown in Fig. P4.14, determine and plot the displacement as a function of time for the interval  $0 \leq t \leq 0.5$  sec. Neglect damping.

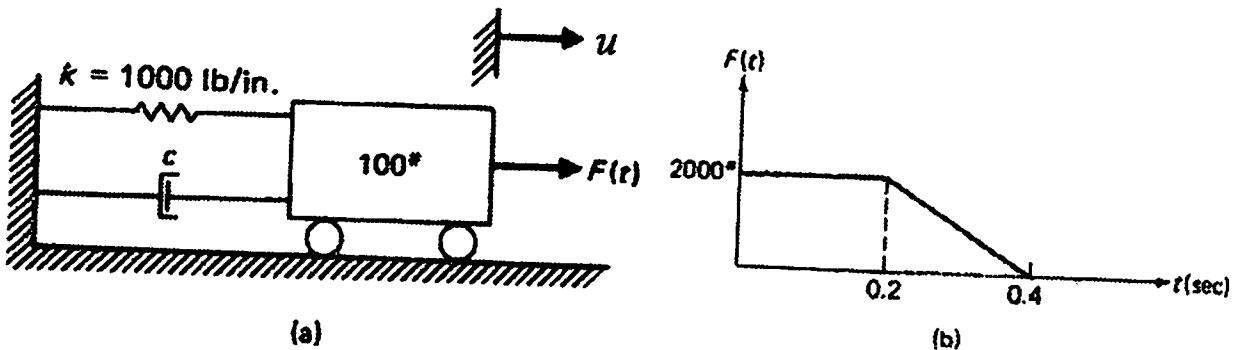


Fig. P4.14

solution

$$m = 100 \text{ lb}$$

$$F_0 = 2000 \text{ lb}$$

$$k = 1000 \text{ lb/in}$$

$$\text{Let } t_1 = 0.2 \text{ sec}$$

$$t_2 = 0.4 \text{ sec}$$

$$\text{Hence for } t \leq t_1, F(t) = F_0$$

$$\text{For } t_1 \leq t \leq t_2, F(t) = F_0(1 - \frac{(t-t_1)}{0.2})$$

For an undamped simple oscillator, using Duhamel integral, the displacement  $u(t)$  is

Hence for  $0 \leq t \leq t_1$

$$\begin{aligned} u_1(t) &= \frac{1}{m\omega_n} \int_0^t F(\tau) \sin \omega_n(t-\tau) d\tau \\ &= \frac{F_0}{m\omega_n} \left( \frac{\cos \omega_n(t-\tau)}{\omega_n} \right)_0^t \\ &= \boxed{\frac{F_0}{m\omega_n^2} (1 - \cos \omega_n t)} \end{aligned}$$

Hence

$$\dot{u}_1(t) = \boxed{\frac{F_0}{m\omega_n} \sin \omega_n t}$$

Note that

$$u_1(t_1) = \frac{F_0}{m\omega_n^2} (1 - \cos 0.2\omega_n)$$

and

$$\dot{u}_1(t_1) = \frac{F_0}{m\omega_n} \sin 0.2\omega_n$$

Now for  $t_1 \leq t \leq t_2$

$$u_2(t) = \underbrace{u_1(t_1) \cos \omega_n(t - t_1) + \frac{\dot{u}_1(t_1)}{\omega_n} \sin \omega_n(t - t_1)}_{\text{response due to initial conditions at } t=1 \text{ free vibration}} + \underbrace{\frac{1}{m\omega_n} \int_{t_1}^t F(\tau) \sin \omega_n(t - \tau) d\tau}_{\text{second integral}} \quad (1)$$

But the free vibration response is , using  $t_1 = 0.2$

$$\begin{aligned} &= \underbrace{\frac{F_0}{m\omega_n^2} (1 - \cos 0.2\omega_n)}_{u_1(t_1)} \cos \omega_n(t - 0.2) + \underbrace{\frac{F_0}{m\omega_n} \sin 0.2\omega_n}_{\dot{u}_1(t_1)} \sin \omega_n(t - 0.2) \\ &= \frac{F_0}{m\omega_n^2} \{ \cos \omega_n(t - 0.2) - \cos 0.2\omega_n \cos \omega_n(t - 0.2) \} + \frac{F_0}{m\omega_n^2} \sin 0.2\omega_n \sin \omega_n(t - 0.2) \\ &= \frac{F_0}{m\omega_n^2} \{ \cos \omega_n(t - 0.2) - \cos 0.2\omega_n \cos \omega_n(t - 0.2) + \sin 0.2\omega_n \sin \omega_n(t - 0.2) \} \end{aligned}$$

and the second integral is

$$\begin{aligned} I_2 &= \int_{t_1}^t F(\tau) \sin \omega_n(t - \tau) d\tau \\ &= \int_{t_1}^t F_0 \left( 1 - \frac{(\tau - t_1)}{0.2} \right) \sin \omega_n(t - \tau) d\tau \\ &= F_0 \int_{t_1}^t \sin \omega_n(t - \tau) d\tau - \frac{F_0}{0.2} \int_{t_1}^t (\tau - t_1) \sin \omega_n(t - \tau) d\tau \\ &\quad \text{use integration by parts} \\ &= F_0 \int_{t_1}^t \sin \omega_n(t - \tau) d\tau - \frac{F_0}{0.2} \overbrace{\int_{t_1}^t \tau \sin \omega_n(t - \tau) d\tau}^t + \frac{t_1 F_0}{0.2} \int_{t_1}^t \sin \omega_n(t - \tau) d\tau \\ &= \left( F_0 + \frac{t_1 F_0}{0.2} \right) \left( \frac{\cos \omega_n(t - \tau)}{\omega_n} \right)_{t_1}^t - \frac{F_0}{0.2} \left\{ \frac{\tau \omega_n \cos \omega_n(t - \tau) + \sin \omega_n(t - \tau)}{\omega_n^2} \right\}_{t_1}^t \\ &= \left( F_0 + \frac{t_1 F_0}{0.2} \right) \frac{1}{\omega_n} \{ \cos \omega_n(t - t) - \cos \omega_n(t - t_1) \} \\ &\quad - \frac{F_0}{0.2 \omega_n^2} \{ t \omega_n \cos \omega_n(t - t) + \sin \omega_n(t - t) - [t_1 \omega_n \cos \omega_n(t - t_1) + \sin \omega_n(t - t_1)] \} \end{aligned}$$

Simplify to

$$I_2 = \frac{F_0}{\omega_n} \left( 1 + \frac{t_1}{0.2} \right) (1 - \cos \omega_n (t - t_1)) - \frac{F_0}{0.2\omega_n^2} \{ t\omega_n - t_1\omega_n \cos \omega_n (t - t_1) - \sin \omega_n (t - t_1) \}$$

Hence  $u_2(t)$  for  $t_1 \leq t \leq t_2$  is by putting the above result back into (1) we obtain

$$\begin{aligned} u_2(t) &= \frac{F_0}{m\omega_n^2} (\cos \omega_n (t - 0.2) - \cos 0.2\omega_n \cos \omega_n (t - 0.2) + \sin 0.2\omega_n \sin \omega_n (t - 0.2)) \\ &\quad + \frac{1}{m\omega_n} \left( \frac{F_0}{\omega_n} \left( 1 + \frac{t_1}{0.2} \right) (1 - \cos \omega_n (t - t_1)) - \frac{F_0}{0.2\omega_n^2} \{ t\omega_n - t_1\omega_n \cos \omega_n (t - t_1) - \sin \omega_n (t - t_1) \} \right) \end{aligned}$$

But  $t_1 = 0.2$ , hence

$$\begin{aligned} u_2(t) &= \frac{F_0}{m\omega_n^2} (\cos \omega_n (t - 0.2) - \cos (0.2\omega_n) \cos \omega_n (t - 0.2) + \sin (0.2\omega_n) \sin \omega_n (t - 0.2)) \\ &\quad + \frac{1}{m\omega_n} \left( \frac{F_0}{\omega_n} \left( 1 + \frac{0.2}{0.2} \right) (1 - \cos \omega_n (t - 0.2)) - \frac{F_0}{0.2\omega_n^2} \{ t\omega_n - 0.2\omega_n \cos \omega_n (t - 0.2) - \sin \omega_n (t - 0.2) \} \right) \\ &= \frac{F_0}{m\omega_n^2} (\cos \omega_n (t - 0.2) - \cos (0.2\omega_n) \cos \omega_n (t - 0.2) + \sin (0.2\omega_n) \sin \omega_n (t - 0.2)) \\ &\quad + \frac{1}{m\omega_n} \left( \frac{2F_0}{\omega_n} - \frac{2F_0}{\omega_n} \cos \omega_n (t - 0.2) - t \frac{F_0}{0.2\omega_n} + \frac{F_0}{\omega_n} \cos \omega_n (t - 0.2) + \frac{F_0}{0.2\omega_n^2} \sin \omega_n (t - 0.2) \right) \end{aligned}$$

simplify

$$\begin{aligned} u_2(t) &= \overbrace{\frac{F_0}{m\omega_n^2} \cos \omega_n (t - 0.2)} - \overbrace{\frac{F_0}{m\omega_n^2} \cos (0.2\omega_n) \cos \omega_n (t - 0.2)} + \overbrace{\frac{F_0}{m\omega_n^2} \sin (0.2\omega_n) \sin \omega_n (t - 0.2)} \\ &\quad + \overbrace{\frac{2F_0}{m\omega_n^2}} - \overbrace{\frac{2F_0}{m\omega_n^2} \cos \omega_n (t - 0.2)} - \overbrace{\frac{t F_0}{0.2m\omega_n^2}} + \overbrace{\frac{F_0}{m\omega_n^2} \cos \omega_n (t - 0.2)} + \overbrace{\frac{F_0}{0.2m\omega_n^3} \sin \omega_n (t - 0.2)} \end{aligned}$$

Hence

$$\begin{aligned} u_2(t) &= -\frac{F_0}{m\omega_n^2} \cos (0.2\omega_n) \cos \omega_n (t - 0.2) + \frac{F_0}{m\omega_n^2} \sin (0.2\omega_n) \sin \omega_n (t - 0.2) + \frac{2F_0}{m\omega_n^2} \\ &\quad - \frac{t F_0}{0.2m\omega_n^2} + \frac{F_0}{0.2m\omega_n^3} \sin \omega_n (t - 0.2) \end{aligned}$$

$$= \boxed{\frac{F_0}{m\omega_n^2} \left( 2 - \cos (0.2\omega_n) \cos \omega_n (t - 0.2) + \sin (0.2\omega_n) \sin \omega_n (t - 0.2) - 5t + \frac{5}{\omega_n} \sin \omega_n (t - 0.2) \right)}$$

Now

$$\dot{u}_2(t) = \boxed{\frac{F_0}{m\omega_n^2} (\omega_n \cos(0.2\omega_n) \sin \omega_n(t-0.2) + \omega_n \sin(0.2\omega_n) \cos \omega_n(t-0.2) - \frac{1}{0.2} + \frac{1}{0.2} \cos \omega_n(t-0.2))}$$

Note that at  $t_2$  we have

$$\begin{aligned} u_2(t_2) &= \frac{F_0}{m\omega_n^2} \left( 2 - \cos(0.2\omega_n) \cos \omega_n(0.4-0.2) + \sin(0.2\omega_n) \sin \omega_n(0.4-0.2) - \frac{0.4}{0.2} + \frac{1}{0.2\omega_n} \sin \omega_n(0.4-0.2) \right) \\ &= \frac{F_0}{m\omega_n^2} \left( 2 - \cos(0.2\omega_n) \cos(0.2\omega_n) + \sin(0.2\omega_n) \sin(0.2\omega_n) - 2 + \frac{1}{0.2\omega_n} \sin 0.2\omega_n \right) \\ &= \boxed{\frac{F_0}{m\omega_n^2} \left( -\cos^2(0.2\omega_n) + \sin^2(0.2\omega_n) + \frac{5}{\omega_n} \sin(0.2\omega_n) \right)} \end{aligned}$$

and at  $t_2 = 0.4$  we have

$$\dot{u}_2(t_2) = \frac{F_0}{m\omega_n^2} \left( \omega_n \cos(0.2\omega_n) \sin(0.2\omega_n) + \omega_n \sin(0.2\omega_n) \cos(0.2\omega_n) - \frac{1}{0.2} + \frac{1}{0.2} \cos 0.2\omega_n \right)$$

Now for  $t \geq t_2$  since no force is applied, we use the free vibration solution using the above  $u_2(t_2)$  and  $\dot{u}_2(t_2)$  as initial conditions

$$\begin{aligned} u_3(t) &= u_2(t_2) \cos \omega_n(t-t_2) + \frac{\dot{u}_2(t_2)}{\omega_n} \sin \omega_n(t-t_2) \\ &= \frac{F_0}{m\omega_n^2} \left( -\cos^2(0.2\omega_n) + \sin^2(0.2\omega_n) + \frac{5}{\omega_n} \sin(0.2\omega_n) \right) \cos \omega_n(t-t_2) \\ &\quad + \frac{F_0}{m\omega_n^3} (\omega_n \cos(0.2\omega_n) \sin 0.2\omega_n + \omega_n \sin(0.2\omega_n) \cos 0.2\omega_n - 5 + 5 \cos 0.2\omega_n) \sin \omega_n(t-t_2) \end{aligned}$$

Now that we have  $u(t)$  for each time segment, we can plot the solution. Here it is for up to  $t = 0.5$  sec


```

In[16]:= Remove["Global`*"];
(*Plot for problem 4.14, HW3. Nasser Abbasi*)

m = 100/386; k = 1000; t1 = 0.2; t2 = 0.4; f0 = 2000; w = Sqrt[k/m];
u1[t_] := f0/m (w)^2 (1 - Cos[w t]);
u2[t_] :=
  f0/m w^2 (2 - Cos[0.2 w] Cos[w (t - 0.2)] + Sin[0.2 w] Sin[w (t - 0.2)] - 5 t + 5/w Sin[w (t - 0.2)]);
u3[t_] :=
  f0/m w^2 (-Cos[0.2 w]^2 + Sin[0.2 w]^2 + 5/w Sin[0.2 w]) Cos[w (t - t2)] +
  f0/m w^3 (w Cos[0.2 w] Sin[0.2 w] + w Sin[0.2 w] Cos[0.2 w] - 5 + 5 Cos[0.2 w]) Sin[w (t - t2)];
u[t_] := Piecewise[{{u1[t], t < t1}, {u2[t], t1 <= t <= t2}, {u3[t], t > t2}}];

Plot[Evaluate[u[t]], {t, 0, .5}, PlotLabel -> "u(t) for problem 4.14",
AxesLabel -> {"t", "u(t)"}, PlotRange -> All];

```

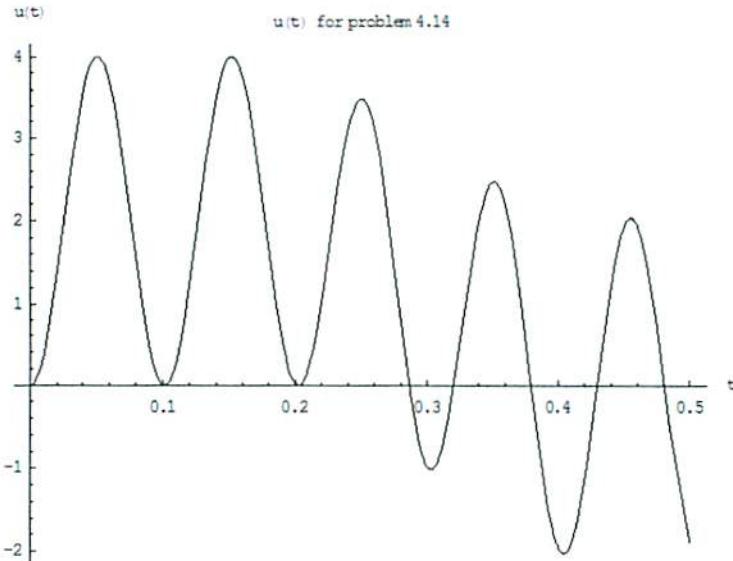

Here is the solution for up to  $t = 1.5$  sec

