

HW 3
Electronic Communication Systems
Fall 2008
California State University, Fullerson

Nasser M. Abbasi

Fall 2008 Compiled on May 29, 2019 at 11:40pm

Contents

1	questions	2
2	Problem 2.7	4
2.1	part(a)	4
3	Problem 2.8	5
4	Problem 2.9	6
5	Problem 2.15	6
6	Problem 2.17	8
7	Problem 2.18	9
7.1	Part(a)	9
7.2	Part(b)	10
7.3	Part(c)	10
8	Key solution	11
9	my graded HW	15

1 questions

443 HW #3 Sept. 17, 2008.

CH. 2 / SIGNALS AND SPECTRA

- 2-3 The voltage across a load is given by $v(t) = A_0 \cos \omega_0 t$, and the current through the load is a square wave,

$$i(t) = I_0 \sum_{n=-\infty}^{\infty} \left[\Pi\left(\frac{t - nT_0}{T_0/2}\right) - \Pi\left(\frac{t - nT_0 - (T_0/2)}{T_0/2}\right) \right]$$

where $\omega_0 = 2\pi/T_0$, $T_0 = 1$ sec, $A_0 = 10$ V, and $I_0 = 5$ mA.

- (a) Find the expression for the instantaneous power and sketch this result as a function of time.
 (b) Find the value of the average power.
- 2-4 The voltage across a 50Ω resistive load is the positive portion of a cosine wave. That is,

$$v(t) = \begin{cases} 10 \cos \omega_0 t, & |t - nT_0| < T_0/4 \\ 0, & t \text{ elsewhere} \end{cases}$$

where n is any integer.

- (a) Sketch the voltage and current waveforms.
 (b) Evaluate the dc values for the voltage and current.
 (c) Find the rms values for the voltage and current.
 (d) Find the total average power dissipated in the load.
- 2-5 For Prob. 2-4, find the energy dissipated in the load during a 1-hr interval if $T_0 = 1$ sec.
- 2-6 Determine whether each of the following signals is an energy signal or a power signal and evaluate the normalized energy or power, as appropriate.

- (a) $w(t) = \Pi(t/T_0)$.
 (b) $w(t) = \Pi(t/T_0) \cos \omega_0 t$.
 (c) $w(t) = \cos^2 \omega_0 t$.

- ✓ 2-7 An average reading power meter is connected to the output circuit of a transmitter. The transmitter output is fed into a 75Ω resistive load and the wattmeter reads 67 W.
 (a) What is the power in dBm units?
 (b) What is the power in dBk units?
 (c) What is the value in dBmV units?
- ✓ 2-8 Assume that a waveform with a known rms value, V_{rms} , is applied across a 50Ω load. Derive a formula that can be used to compute the dBm value from V_{rms} .
- ✓ 2-9 An amplifier is connected to a 50Ω load and driven by a sinusoidal current source as shown in Fig. P2-9. The output resistance of the amplifier is 10Ω and the input resistance is $2\text{k}\Omega$. Evaluate the true decibel gain of this circuit.

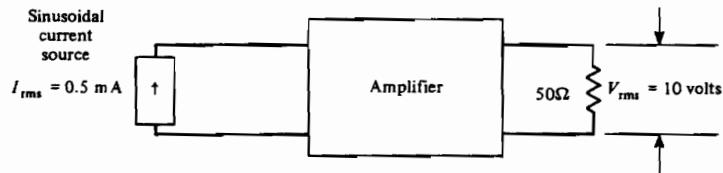


FIGURE P2-9

PROBLEMS

81

- 2-10 The voltage (rms) across the 300Ω antenna input terminals of an FM receiver is $3.5 \mu V$.

(a) Find the input power (watts).

(b) Evaluate the input power as measured in decibels below 1 mW (dBm).

(c) What would be the input voltage (in microvolts) for the same input power if the input resistance were 75Ω instead of 300Ω ?

- 2-11 What is the value for the phasor that corresponds to the voltage waveform $v(t) = 12 \sin(\omega_0 t - 25^\circ)$, where $\omega_0 = 2000\pi$?

- 2-12 A signal is $w(t) = 3 \sin(100\pi t - 30^\circ) + 4 \cos(100\pi t)$. Find the corresponding phasor.

- 2-13 Evaluate the Fourier transform of

$$w(t) = \begin{cases} e^{-\alpha t}, & t \geq 1 \\ 0, & t < 1 \end{cases}$$

- 2-14 Find the spectrum for the waveform $w(t) = e^{-\pi(t/T)^2}$. What can we say about the width of $w(t)$ and $W(f)$ as T increases? [Hint: Use (A-75).]

- ✓ 2-15 Using the convolution property, find the spectrum for

$$w(t) = \sin 2\pi f_1 t \cos 2\pi f_2 t$$

- 2-16 Find the spectrum (Fourier transform) of the triangle waveform

$$s(t) = \begin{cases} At, & 0 < t < T_0 \\ 0, & t \text{ elsewhere} \end{cases}$$

in terms of A and T_0 .

- ✓ 2-17 Find the spectrum for the waveform shown in Fig. P2-17.

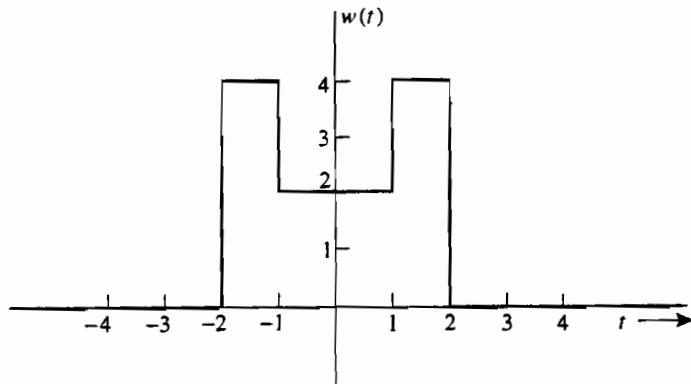


FIGURE P2-17

- ✓ 2-18 If $w(t)$ has the Fourier transform

$$W(f) = \frac{j2\pi f}{1 + j2\pi f}$$

find $X(f)$ for the following waveforms.

(a) $x(t) = w(2t + 2)$.

$$\text{Ans: } x(t) = \frac{1}{2} \int_{-\infty}^t w(t') dt'$$

$$(b) \quad x(t) = w(t-1)e^{-jt}$$

$$(c) \quad x(t) = w(t-t')$$

2 Problem 2.7

Problem An average reading power meter is connected to output of transmitter. Transmitter output is fed into 75Ω resistive load and the wattmeter read $67W$

- (a) What is power in dBm units?
- (b) What is power in dBk units?
- (c) What is the value in dBmV units?

2.1 part(a)

$$\begin{aligned} P_{dbm} &= 10 \log_{10} P_m \\ &= 10 \log_{10} (67000) \\ &= \boxed{48.2607} \text{ dbm} \end{aligned}$$

(b)

$$\begin{aligned} P_{dbk} &= 10 \log_{10} P_k \\ &= 10 \log_{10} (0.067) \\ &= \boxed{-11.7393} \text{ dbk} \end{aligned}$$

(c)

$$P = \frac{V^2}{R}$$

Hence

$$10 \log_{10} P = 20 \log_{10} V - 10 \log_{10} R$$

Hence

$$20 \log_{10} V = 10 \log_{10} P + 10 \log_{10} R$$

so

$$\begin{aligned} 20 \log_{10} V &= 10 \log_{10} 67000 + 10 \log_{10} 75000 \\ &= \boxed{97.0114 \text{ dbmV}} \end{aligned}$$

3 Problem 2.8

Assume that a waveform with known rms value V_{rms} is applied across a 50Ω load. Derive a formula that can be used to computer the dbm value from V_{rms}

$$P(watt) = \frac{V_{rms}^2(V)}{R(\Omega)}$$

Hence

$$\begin{aligned} P_{dbm} &= 10 \log_{10} (10^3 \times P_{watt}) \\ &= 10 \log_{10} \frac{10^3 \times V_{rms}^2(V)}{R(\Omega)} \\ &= 10 (\log_{10} 10^3 V_{rms}^2 - \log_{10} R) \\ &= 10 (\log_{10} 10^3 + \log_{10} V_{rms}^2 - \log_{10} R) \\ &= 10 (3 + 2 \log_{10} V_{rms} - \log_{10} R) \end{aligned}$$

Hence

$P_{dbm} = 30 + 20 \log_{10} V_{rms} - 10 \log_{10} R$

When $R = 50\Omega$, we obtain

$$\begin{aligned} P_{dbm} &= 30 + 20 \log_{10} V_{rms} - 10 \log_{10} 50 \\ &= 30 + 20 \log_{10} V_{rms} - 16.9897 \\ &= 13.0103 + 20 \log_{10} V_{rms} \end{aligned}$$

4 Problem 2.9

- ✓ 2-8 Assume that a wavefield ~~with a power source~~ can be used to compute the dBm value from V_{rms} .
 ✓ 2-9 An amplifier is connected to a 50Ω load and driven by a sinusoidal current source as shown in Fig. P2-9. The output resistance of the amplifier is 10Ω and the input resistance is $2k\Omega$. Evaluate the true decibel gain of this circuit.

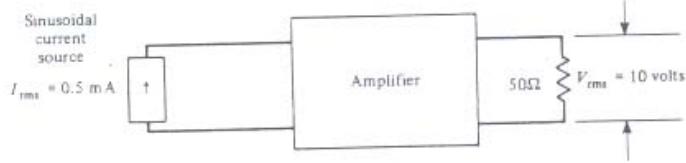


FIGURE P2-9

Figure 1: the Problem statement

$$\begin{aligned}
 Gain(db) &= 10 \log_{10} \frac{P_L}{P_i} \\
 &= 10 \log_{10} \frac{\left(\frac{V_{rms}^2}{R_L}\right)}{I_{rms}^2 R_{in}} \\
 &= 10 \log_{10} \frac{\left(\frac{10^2}{50}\right)}{(0.5 \times 10^{-3})^2 \times 2000} \\
 &= 10 \log_{10} \frac{10^5}{25} \\
 &= 10 (\log_{10} 10^5 - \log_{10} 25) \\
 &= 10 (5 - 1.39794) \\
 &= 36.021
 \end{aligned}$$

5 Problem 2.15

Using the convolution property find the spectrum for $w(t) = \sin 2\pi f_1 t \cos 2\pi f_2 t$

Solution:

$$\mathcal{F}(w(t)) = \mathcal{F}(\sin 2\pi f_1 t) \otimes \mathcal{F}(\cos 2\pi f_2 t) \quad (1)$$

But

$$\begin{aligned}
 \mathcal{F}(\sin 2\pi f_1 t) &= \frac{1}{2j} (\delta(f - f_1) - \delta(f + f_1)) \\
 \mathcal{F}(\cos 2\pi f_2 t) &= \frac{1}{2} (\delta(f - f_2) + \delta(f + f_2))
 \end{aligned}$$

Hence (1) becomes

$$\begin{aligned} \mathcal{F}(w(t)) &= \left\{ \frac{1}{2j} (\delta(f - f_1) - \delta(f + f_1)) \right\} \otimes \left\{ \frac{1}{2} (\delta(f - f_2) + \delta(f + f_2)) \right\} \\ &= \frac{1}{4j} \{ \delta(f - f_1) - \delta(f + f_1) \} \otimes \{ \delta(f - f_2) + \delta(f + f_2) \} \end{aligned} \quad (2)$$

Applying the distributed property of convolution, i.e. $a \otimes (b + c) = a \otimes b + a \otimes c$ on equation (2) we obtain

$$4j \mathcal{F}(w(t)) = \delta(f - f_1) \otimes \delta(f - f_2) + \delta(f - f_1) \otimes \delta(f + f_2) - \delta(f + f_1) \otimes \delta(f - f_2) - \delta(f + f_1) \otimes \delta(f + f_2) \quad (3)$$

Now

$$\begin{aligned} \delta(f - f_1) \otimes \delta(f - f_2) &= \int_{-\infty}^{\infty} \delta(\lambda - f_1) \delta(f - (\lambda - f_2)) d\lambda \\ &= \delta(f + f_2 - f_1) \int_{-\infty}^{\infty} \delta(f - (\lambda - f_2)) d\lambda \\ &= \delta(f + f_2 - f_1) \end{aligned} \quad (4)$$

And

$$\begin{aligned} \delta(f - f_1) \otimes \delta(f + f_2) &= \int_{-\infty}^{\infty} \delta(\lambda - f_1) \delta(f - (\lambda + f_2)) d\lambda \\ &= \delta(f - f_2 - f_1) \int_{-\infty}^{\infty} \delta(f - (\lambda - f_2)) d\lambda \\ &= \delta(f - f_2 - f_1) \end{aligned} \quad (5)$$

And

$$\begin{aligned} \delta(f + f_1) \otimes \delta(f - f_2) &= \int_{-\infty}^{\infty} \delta(\lambda + f_1) \delta(f - (\lambda - f_2)) d\lambda \\ &= \delta(f + f_2 + f_1) \int_{-\infty}^{\infty} \delta(f - (\lambda - f_2)) d\lambda \\ &= \delta(f + f_2 + f_1) \end{aligned} \quad (6)$$

And

$$\begin{aligned} \delta(f + f_1) \otimes \delta(f + f_2) &= \int_{-\infty}^{\infty} \delta(\lambda + f_1) \delta(f - (\lambda + f_2)) d\lambda \\ &= \delta(f - f_2 + f_1) \int_{-\infty}^{\infty} \delta(f - (\lambda - f_2)) d\lambda \\ &= \delta(f - f_2 + f_1) \end{aligned} \quad (7)$$

Substitute (4,5,6,7) into (3) we obtain

$$\mathcal{F}(w(t)) = \frac{1}{4j} [\delta(f + f_2 - f_1) + \delta(f - f_2 - f_1) - \delta(f + f_2 + f_1) - \delta(f - f_2 + f_1)]$$

or

$$\mathcal{F}(w(t)) = \frac{1}{4j} [\delta(f + (f_2 - f_1)) + \delta(f - (f_2 + f_1)) - \delta(f + (f_2 + f_1)) - \delta(f - (f_2 - f_1))] \quad (8)$$

This problem can also be solved as follows

$$w(t) = \sin 2\pi f_1 t \cos 2\pi f_2 t$$

Using $\sin \alpha \cos \beta = \frac{1}{2} (\sin(\alpha - \beta) + \sin(\alpha + \beta))$, hence

$$\begin{aligned} w(t) &= \frac{1}{2} (\sin(2\pi f_1 t - 2\pi f_2 t) + \sin(2\pi f_1 t + 2\pi f_2 t)) \\ &= \frac{1}{2} (\sin(2\pi(f_1 - f_2)t) + \sin(2\pi(f_1 + f_2)t)) \\ &= \frac{1}{2} \left(\frac{1}{2j} (\delta(f - (f_1 - f_2)) - \delta(f + (f_1 - f_2))) + \frac{1}{2j} (\delta(f - (f_1 + f_2)) - \delta(f + (f_1 + f_2))) \right) \\ &= \frac{1}{4j} \{\delta(f - (f_1 - f_2)) - \delta(f + (f_1 - f_2)) + \delta(f - (f_1 + f_2)) - \delta(f + (f_1 + f_2))\} \\ &= \frac{1}{4j} \{\delta(f + (f_2 - f_1)) + \delta(f - (f_2 + f_1)) - \delta(f + (f_2 + f_1)) - \delta(f - (f_2 - f_1))\} \end{aligned} \quad (9)$$

Compare (8) and (9) we see they are the same.

6 Problem 2.17

$$w(t) = 4 \operatorname{rect}\left(\frac{t}{4}\right) - 2 \operatorname{rect}\left(\frac{t}{2}\right)$$

By linearity of Fourier Transform

$$\mathcal{F}(w(t)) = 4 \times \mathcal{F}\left(\operatorname{rect}\left(\frac{t}{4}\right)\right) - 2 \times \mathcal{F}\left(\operatorname{rect}\left(\frac{t}{2}\right)\right) \quad (1)$$

Since

$$\mathcal{F}\left(\operatorname{rect}\left(\frac{t}{4}\right)\right) = 4 \operatorname{sinc}(4f)$$

and

$$\mathcal{F} \left(\text{rect} \left(\frac{t}{2} \right) \right) = 2 \text{sinc}(2f)$$

Then (1) becomes

$$\begin{aligned} \mathcal{F}(w(t)) &= 4 \times 4 \text{sinc}(4f) - 2 \times 2 \text{sinc}(2f) \\ &= \boxed{16 \text{sinc}(4f) - 4 \text{sinc}(2f)} \end{aligned}$$

Or in terms of just the sin function, the above becomes

$$\begin{aligned} \mathcal{F}(w(t)) &= 16 \frac{\sin(4\pi f)}{4\pi f} - 4 \frac{\sin(2\pi f)}{2\pi f} \\ &= 4 \frac{\sin(4\pi f)}{\pi f} - 2 \frac{\sin(2\pi f)}{\pi f} \\ &= \boxed{\frac{4 \sin(4\pi f) - 2 \sin(2\pi f)}{\pi f}} \end{aligned}$$

7 Problem 2.18

If $w(t)$ has the Fourier Transform $W(f) = \frac{j2\pi f}{1+j2\pi f}$ find $X(f)$ for the following waveforms

- (a) $x(t) = w(2t + 2)$
- (b) $x(t) = w(t - 1) e^{-jt}$
- (c) $x(t) = w(1 - t)$

Answer:

7.1 Part(a)

$$w(t) \Leftrightarrow \frac{j2\pi f}{1 + j2\pi f}$$

Then

$$\begin{aligned} w(2t) &\Leftrightarrow \frac{1}{2} X \left(\frac{f}{2} \right) \\ w(2t + 2) &\Leftrightarrow \frac{1}{2} X \left(\frac{f}{2} \right) e^{j2\pi \frac{f}{2}(2)} \end{aligned}$$

Hence

$$\begin{aligned} w(2t + 2) &\Leftrightarrow \frac{1}{2} \left(\frac{j2\pi \frac{f}{2}}{1 + j2\pi \frac{f}{2}} \right) e^{j2\pi f} \\ &\Leftrightarrow \frac{1}{2} \left(\frac{j\pi f}{1 + j\pi f} \right) e^{j2\pi f} \end{aligned}$$

This can be simplified to

$$w(2t+2) \Leftrightarrow \frac{\pi f}{2(\pi f-j)} e^{j2\pi f}$$

7.2 Part(b)

$$w(t) \Leftrightarrow \frac{j2\pi f}{1+j2\pi f}$$

$$\begin{aligned} w(t-1) &\Leftrightarrow X(f) e^{-j2\pi f(-1)} \\ w(t-1) &\Leftrightarrow X(f) e^{j2\pi f} \end{aligned}$$

Now Let $e^{-jt} = e^{-j2\pi f_0 t}$, hence $2\pi f_0 = 1$ or $f_0 = \frac{1}{2\pi}$, then

$$w(t-1) e^{-j2\pi f_0 t} \Leftrightarrow X(f + f_0) e^{j2\pi(f+f_0)}$$

Hence

$$\begin{aligned} w(t-1) e^{-jt} &\Leftrightarrow \frac{j2\pi(f+f_0)}{1+j2\pi(f+f_0)} e^{j2\pi(f+f_0)} \\ w(t-1) e^{-jt} &\Leftrightarrow \frac{j2\pi\left(f+\frac{1}{2\pi}\right)}{1+j2\pi\left(f+\frac{1}{2\pi}\right)} e^{j2\pi\left(f+\frac{1}{2\pi}\right)} \\ w(t-1) e^{-jt} &\Leftrightarrow \frac{j2\pi(2\pi f+1)}{2\pi+j2\pi(2\pi f+1)} e^{j(2\pi f+1)} \\ w(t-1) e^{-jt} &\Leftrightarrow \frac{j4\pi^2 f + j2\pi}{2\pi+j4\pi^2 f + j2\pi} e^{j2\pi f} e^j \\ w(t-1) e^{-jt} &\Leftrightarrow \frac{2\pi f+1}{-j+2\pi f+1} e^{j2\pi f} e^j \end{aligned}$$

Hence

$$w(t-1) e^{-jt} \Leftrightarrow \frac{2\pi f+1}{-j+2\pi f} e^{j(2\pi f+1)}$$

7.3 Part(c)

$$\begin{aligned} w(t) &\Leftrightarrow \frac{j2\pi f}{1+j2\pi f} \\ w(-t) &\Leftrightarrow X(-f) \end{aligned}$$

Then

$$\begin{aligned} w(-t+1) &\Leftrightarrow X(-f) e^{j2\pi f(1)} \\ w(1-t) &\Leftrightarrow \frac{-j2\pi f}{1-j2\pi f} e^{j2\pi f} \end{aligned}$$

8 Key solution

EE 443

HW # 3
Key Solution

page 1

2-7.

$$(a) dBm = 10 \log_{10} \left(\frac{P_m}{0.001} \right) = 10 \log_{10} \left(\frac{67}{0.001} \right) = \underline{48.26 \text{ dBm}}$$

$$(b) dBk = 10 \log_{10} \left(\frac{P_m}{1000} \right) = 10 \log_{10} \left(\frac{67}{1000} \right) = \underline{-11.74 \text{ dBk}}$$

$$(c) P = \frac{V_{rms}^2}{R}$$

$$\Rightarrow V_{rms} = \sqrt{P R} = \sqrt{(67)(75)} = 70.9 \text{ Volts}$$

$$\Rightarrow dBV = 20 \log_{10} \left(\frac{70.9}{10^3} \right) = \underline{97 \text{ dBmV}}$$

$$\boxed{2-8.} \quad P = \frac{V_{rms}^2}{R} = \frac{V_{rms}^2}{50}$$

$$dBm = 10 \log_{10} \left(\frac{P}{0.001} \right) = 10 \log_{10} \left(\frac{V_{rms}^2}{0.050} \right) = 20 \log_{10} (V_{rms}) - 10 \log_{10} (0.050)$$

$$\Rightarrow \underline{dBm = 20 \log_{10} (V_{rms}) + 13}$$

$$\boxed{2-9.} \quad P_{in} = I_{rms}^2 R_{in} = (0.5 \times 10^{-3})^2 (2 \times 10^3) = 5.0 \times 10^{-4} W$$

$$P_{out} = \frac{V_{rms}^2}{R_{load}} = \frac{100}{50} = 2 W$$

$$dB = 10 \log_{10} \left(\frac{P_{out}}{P_{in}} \right) = 10 \log_{10} \left(\frac{2}{5.0 \times 10^{-4}} \right) = \underline{36 \text{ dB}}$$

$$\boxed{2-15.} \quad w(t) = \sin(2\pi f_1 t) \cos(2\pi f_2 t) = w_1(t) w_2(t)$$

$$\Rightarrow W(f) = W_1(f)W_2(f) = \left[\frac{1}{2}\delta(f+f_1) - \frac{1}{2}\delta(f-f_1) \right] * \left[\frac{1}{2}\delta(f+f_2) + \frac{1}{2}\delta(f-f_2) \right]$$

$$\text{Aside: } \delta(f+f_1) * \delta(f+f_2) = \int_{-\infty}^{\infty} \delta(\lambda+f_1) \delta(f+f_2) d\lambda = \delta(f+f_1+f_2)$$


$$\text{thus } \underline{W(f) = \left(\frac{1}{4} \right) [\delta(f+f_1+f_2) + \delta(f+f_1-f_2) - \delta(f-f_1+f_2) - \delta(f-f_1-f_2)]}$$

EE 443

Hw #3


page 2

2-17.

$$w(t) = w_1(t) - w_2(t) \text{ where}$$


$$w_1(t) = 4 \operatorname{rect}\left(\frac{t}{f}\right)$$

$$\longleftrightarrow W_1(f) = 16 \sin(4f)$$



$$w_2(t) = 2 \operatorname{rect}\left(\frac{t}{2}\right)$$

$$\longleftrightarrow W_2(f) = 4 \sin(2f)$$

$$\Rightarrow W(f) = W_1(f) - W_2(f) = \underline{16 \sin(4f) - 4 \sin(2f)}$$

2-18.

(a) $w(2t) \longleftrightarrow \frac{1}{2} \frac{j\pi f}{1+j\pi f}$

$$\Rightarrow x(t) = w(2(t+1)) \longleftrightarrow \frac{j\pi f}{2(1+j\pi f)} e^{j2\pi f}$$

(b) $w(t-1) \longleftrightarrow \frac{j2\pi f}{1+j2\pi f} e^{-j2\pi f}$

$$x(t) = e^{-jt} w(t-1) \longleftrightarrow \frac{j2\pi(f + \frac{1}{2\pi})}{1+j2\pi(f + \frac{1}{2\pi})} e^{j2\pi(f + \frac{1}{2\pi})}$$

(c) $2 \frac{dw(t)}{dt} \longleftrightarrow 2(j\pi f W(f))$

$$\Rightarrow x(t) \longleftrightarrow j4\pi f \left[\frac{j2\pi f}{1+j2\pi f} \right] = -\frac{8\pi^2 f^2}{1+j2\pi f}$$

(d) $w(-t) \longleftrightarrow W(-f) = -\frac{j2\pi f}{1-j2\pi f}$

$$\Rightarrow x(t) = w(-(t-1)) \longleftrightarrow -\frac{j2\pi f}{1-j2\pi f} e^{-j2\pi f}$$

EE 443

HW # 2 (Hint)

page 1

$$2.17) \quad P = 67 \text{ W} \quad \text{and} \quad R = 50 \Omega$$

$$a,b) \quad P_{\text{dBW}} \triangleq 10 \log_{10} P(\text{W})$$

$$P_{\text{dBm}} = 10 \log_{10} P(\text{mW}) \quad , \quad P_{\text{dBF}} = 10 \log_{10} P(\text{kW})$$

c) • For normalized case ($R = 1 \Omega$), the average power P_{av} and rms voltage are related:

$$P_{\text{av}} = \frac{V_{\text{rms}}^2}{R} = \frac{V_{\text{peak}}^2}{2} \Rightarrow V_{\text{rms}} = \frac{V_{\text{peak}}}{\sqrt{2}}$$

• For not normalized case ($R \neq 1 \Omega$)

$$P_{\text{av}} = \frac{V_{\text{rms}}^2}{R} = \frac{V_{\text{peak}}^2}{2R}$$

if P and R are given \Rightarrow find V_{rms} .

$$V_{\text{rms}}$$
 in dBmV is: $V_{\text{rms, (dBmV)}} \triangleq 20 \log_{10} V_{\text{rms, (mV)}}$

2.8) Given a Sine wave like:

$$v(t) = V_{\text{peak}} \cos \omega_0 t \quad (\text{normalized})$$

the average power of this periodic wave over one period, $T_0 = \frac{1}{f_0}$, is:

$$\begin{aligned} P_{\text{av}} &\triangleq \frac{1}{T_0} \int_{-T_0/2}^{T_0/2} v^2(t) dt = \frac{1}{T_0} \int_{-T_0/2}^{T_0/2} V_{\text{peak}}^2 \cos^2 \omega_0 t dt \\ &= \frac{V_{\text{peak}}^2}{2T_0} \int_{-T_0/2}^{T_0/2} (1 + \cos 2\omega_0 t) dt = \frac{V_{\text{peak}}^2}{2} \end{aligned}$$

$$\text{If } R \neq 1 \Omega \Rightarrow P_{\text{av}} = \frac{V_{\text{peak}}^2}{2R} = \frac{V_{\text{rms}}^2}{R} \text{ watt/s}$$

$$\Rightarrow P_{\text{dBm}} \triangleq 10 \log_{10} P(\text{mW}) = 10 \log \left[\frac{V_{\text{rms}}^2 \times 10^3}{R} \right] = \dots$$

EE 443

Hw #3. (Hint)

page 2

2.9) The power gain is:

$$AP_{dB} \equiv 10 \log \frac{P_L}{P_{in}} \quad \text{where, } P_L = \frac{V_o^2}{R_L}$$

P_L is the power transferred to the load and
 P_{in} is the input power supplied by the source

2.17)

 $w(t)$ may be expressed in two different way:

a) $w(t) = 4 \operatorname{rect}\left(\frac{t}{4}\right) - 2 \operatorname{rect}\left(\frac{t}{2}\right) \quad \text{or}$

b) $w(t) = 2 \operatorname{rect}\left(\frac{t}{2}\right) + 4 \operatorname{rect}\left(\frac{t+3/2}{1}\right) + 4 \operatorname{rect}\left(\frac{t-3/2}{1}\right)$

Find $w(t)$! The two answers should be the same.
 If you use the second method, you may suffer
 taking F.T use $\sin \alpha \cos \beta = \frac{1}{2} [\sin(\alpha-\beta) + \sin(\alpha+\beta)]$

2.18)

if $w(t)$ has F.T, which is $W(f) = \frac{\delta 2\pi f}{1+j2\pi f}$

a) Find the F.T of $x(t) = w(2t+2) = w(2(t+1))$

$$w(2t) \longleftrightarrow \frac{1}{2} \cdot \frac{\delta 2\pi \left(\frac{f}{2}\right)}{j + \delta 2\pi \left(\frac{f}{2}\right)} \quad \text{Scaling}$$

$$x(t) = w(2(t+1)) \longleftrightarrow \frac{j\pi f}{2(1+j\pi f)} e^{j2\pi f \cdot 1} \quad \begin{array}{l} \text{time domain} \\ \text{shifting!} \end{array}$$

9 my graded HW

HW3, EGEE 443. CSUF, Fall 2008

Nasser Abbasi

September 22, 2008

13.5
20

1 Problem 2.7

Problem An average reading power meter is connected to output of transmitter. Transmitter output is fed into 75Ω resistive load and the wattmeter read $67W$

- (a) What is power in dBm units?
- (b) What is power in dBk units?
- (c) What is the value in dBmV units?

1.1 part(a)

$$\begin{aligned} P_{dbm} &= 10 \log_{10} P_m \\ &= 10 \log_{10} (67000) \\ &= \boxed{48.2607} \text{ dbm} \end{aligned}$$

(b)

$$\begin{aligned} P_{dkb} &= 10 \log_{10} P_k \\ &= 10 \log_{10} (0.067) \\ &= \boxed{-11.7393} \text{ dbk} \end{aligned}$$

(c)

$$P = \frac{V^2}{R}$$

Hence

$$10 \log_{10} P = 20 \log_{10} V - 10 \log_{10} R$$

Hence

$$20 \log_{10} V = 10 \log_{10} P + 10 \log_{10} R$$

so

$$\begin{aligned} 20 \log_{10} V &= 10 \log_{10} 67000 + 10 \log_{10} 75000 \\ &= \boxed{97.0114 \text{ dbmV}} \end{aligned}$$

2 Problem 2.8

Assume that a waveform with known rms value V_{rms} is applied across a 50Ω load. Derive a formula that can be used to computer the dbm value from V_{rms}

$$P \text{ (watt)} = \frac{V_{rms}^2 (V)}{R (\Omega)}$$

Hence

$$\begin{aligned} P_{dbm} &= 10 \log_{10} (10^3 \times P_{watt}) \\ &= 10 \log_{10} \frac{10^3 \times V_{rms}^2 (V)}{R (\Omega)} \\ &= 10 (\log_{10} 10^3 V_{rms}^2 - \log_{10} R) \\ &= 10 (\log_{10} 10^3 + \log_{10} V_{rms}^2 - \log_{10} R) \\ &= 10 (3 + 2 \log_{10} V_{rms} - \log_{10} R) \end{aligned}$$

Hence

$$P_{dbm} = 30 + 20 \log_{10} V_{rms} - 10 \log_{10} R$$

When $R = 50\Omega$, we obtain

$$\begin{aligned} P_{dbm} &= 30 + 20 \log_{10} V_{rms} - 10 \log_{10} 50 \\ &= 30 + 20 \log_{10} V_{rms} - 16.9897 \\ &= 13.0103 + 20 \log_{10} V_{rms} \end{aligned}$$

3 Problem 2.9

- ✓ 2-8 Assume that a waveform with a rms value of V_{rms} is applied to a 50Ω load. Derive a formula that can be used to compute the dBm value from V_{rms} .
- ✓ 2-9 An amplifier is connected to a 50Ω load and driven by a sinusoidal current source as shown in Fig. P2-9. The output resistance of the amplifier is 10Ω and the load resistance is $2\text{k}\Omega$. Evaluate the true decibel gain of this circuit.

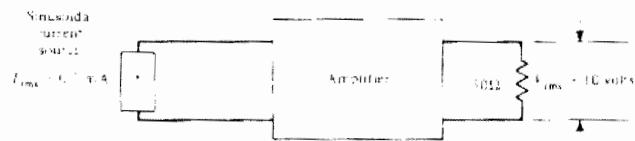


FIGURE P2-9

$$\begin{aligned}
 Gain(db) &= 10 \log_{10} \frac{P_L}{P_i} \\
 &= 10 \log_{10} \frac{\left(\frac{V_{rms}^2}{R_L}\right)}{I_{rms}^2 R_{in}} \\
 &= 10 \log_{10} \frac{\left(\frac{10^2}{50}\right)}{(0.5 \times 10^{-3})^2 \times 2000} \\
 &= 10 \log_{10} \frac{10^5}{25} \\
 &= 10 (\log_{10} 10^5 - \log_{10} 25) \\
 &= 10 (5 - 1.39794) \\
 &= 36.021
 \end{aligned}$$

4 Problem 2.15

Using the convolution property find the spectrum for $w(t) = \sin 2\pi f_1 t \cos 2\pi f_2 t$

Solution:

$$\mathcal{F}(w(t)) = \mathcal{F}(\sin 2\pi f_1 t) \otimes \mathcal{F}(\cos 2\pi f_2 t) \quad (1)$$

But

$$\begin{aligned}\mathcal{F}(\sin 2\pi f_1 t) &= \frac{1}{2j} (\delta(f - f_1) - \delta(f + f_1)) \\ \mathcal{F}(\cos 2\pi f_2 t) &= \frac{1}{2} (\delta(f - f_2) + \delta(f + f_2))\end{aligned}$$

Hence (1) becomes

$$\begin{aligned}\mathcal{F}(w(t)) &= \left\{ \frac{1}{2j} (\delta(f - f_1) - \delta(f + f_1)) \right\} \otimes \left\{ \frac{1}{2} (\delta(f - f_2) + \delta(f + f_2)) \right\} \\ &= \frac{1}{4j} \{ \delta(f - f_1) - \delta(f + f_1) \} \otimes \{ \delta(f - f_2) + \delta(f + f_2) \}\end{aligned} \quad (2)$$

Applying the distributed property of convolution, i.e. $a \otimes (b + c) = a \otimes b + a \otimes c$ on equation (2) we obtain

$$4j \mathcal{F}(w(t)) = \delta(f - f_1) \otimes \delta(f - f_2) + \delta(f - f_1) \otimes \delta(f + f_2) - \delta(f + f_1) \otimes \delta(f - f_2) - \delta(f + f_1) \otimes \delta(f + f_2) \quad (3)$$

Now

$$\begin{aligned}\delta(f - f_1) \otimes \delta(f - f_2) &= \int_{-\infty}^{\infty} \delta(\lambda - f_1) \delta(f - (\lambda - f_2)) d\lambda \\ &= \delta(f + f_2 - f_1) \int_{-\infty}^{\infty} \delta(f - (\lambda - f_2)) d\lambda \\ &= \delta(f + f_2 - f_1)\end{aligned} \quad (4)$$

And

$$\begin{aligned}\delta(f - f_1) \otimes \delta(f + f_2) &= \int_{-\infty}^{\infty} \delta(\lambda - f_1) \delta(f - (\lambda + f_2)) d\lambda \\ &= \delta(f - f_2 - f_1) \int_{-\infty}^{\infty} \delta(f - (\lambda - f_2)) d\lambda \\ &= \delta(f - f_2 - f_1)\end{aligned} \quad (5)$$

And

$$\begin{aligned}
 \delta(f + f_1) \otimes \delta(f - f_2) &= \int_{-\infty}^{\infty} \delta(\lambda + f_1) \delta(f - (\lambda - f_2)) d\lambda \\
 &= \delta(f + f_2 + f_1) \int_{-\infty}^{\infty} \delta(f - (\lambda - f_2)) d\lambda \\
 &= \delta(f + f_2 + f_1)
 \end{aligned} \tag{6}$$

And

$$\begin{aligned}
 \delta(f + f_1) \otimes \delta(f + f_2) &= \int_{-\infty}^{\infty} \delta(\lambda + f_1) \delta(f - (\lambda + f_2)) d\lambda \\
 &= \delta(f - f_2 + f_1) \int_{-\infty}^{\infty} \delta(f - (\lambda - f_2)) d\lambda \\
 &= \delta(f - f_2 + f_1)
 \end{aligned} \tag{7}$$

Substitute (4,5,6,7) into (3) we obtain

$$F(w(t)) = \frac{1}{4j} [\delta(f + f_2 - f_1) + \delta(f - f_2 - f_1) - \delta(f + f_2 + f_1) - \delta(f - f_2 + f_1)]$$

or

$$F(w(t)) = \frac{1}{4j} [\delta(f + (f_2 - f_1)) + \delta(f - (f_2 + f_1)) - \delta(f + (f_2 + f_1)) - \delta(f - (f_2 - f_1))] \tag{8}$$

This problem can also be solved as follows

$$w(t) = \sin 2\pi f_1 t \cos 2\pi f_2 t$$

Using $\sin \alpha \cos \beta = \frac{1}{2} (\sin(\alpha - \beta) + \sin(\alpha + \beta))$, hence

$$\begin{aligned}
 w(t) &= \frac{1}{2} (\sin(2\pi f_1 t - 2\pi f_2 t) + \sin(2\pi f_1 t + 2\pi f_2 t)) \\
 &= \frac{1}{2} (\sin(2\pi(f_1 - f_2)t) + \sin(2\pi(f_1 + f_2)t)) \\
 &= \frac{1}{2} \left(\frac{1}{2j} (\delta(f - (f_1 - f_2)) - \delta(f + (f_1 - f_2))) + \frac{1}{2j} (\delta(f - (f_1 + f_2)) - \delta(f + (f_1 + f_2))) \right) \\
 &= \frac{1}{4j} \{ \delta(f - (f_1 - f_2)) - \delta(f + (f_1 - f_2)) + \delta(f - (f_1 + f_2)) - \delta(f + (f_1 + f_2)) \} \\
 &= \frac{1}{4j} \{ \delta(f + (f_2 - f_1)) + \delta(f - (f_2 + f_1)) - \delta(f + (f_2 + f_1)) - \delta(f - (f_2 - f_1)) \}
 \end{aligned} \tag{9}$$

Compare (8) and (9) we see they are the same.

5 Problem 2.17

✓ 2-17 Find the spectrum for the waveform shown in Fig. P2.17.

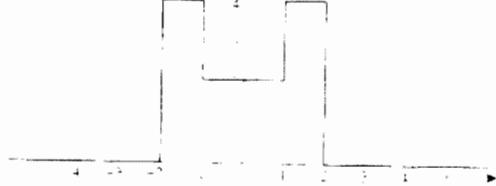


FIGURE P2.17

$$w(t) = 4 \operatorname{rect}\left(\frac{t}{4}\right) - 2 \operatorname{rect}\left(\frac{t}{2}\right)$$

By linearity of Fourier Transform

$$\mathcal{F}(w(t)) = 4 \times \mathcal{F}\left(\operatorname{rect}\left(\frac{t}{4}\right)\right) - 2 \times \mathcal{F}\left(\operatorname{rect}\left(\frac{t}{2}\right)\right) \quad (1)$$

Since

$$\mathcal{F}\left(\operatorname{rect}\left(\frac{t}{4}\right)\right) = 4 \operatorname{sinc}(4f)$$

and

$$\mathcal{F}\left(\operatorname{rect}\left(\frac{t}{2}\right)\right) = 2 \operatorname{sinc}(2f)$$

Then (1) becomes

$$\begin{aligned} \mathcal{F}(w(t)) &= 4 \times 4 \operatorname{sinc}(4f) - 2 \times 2 \operatorname{sinc}(2f) \\ &= \boxed{16 \operatorname{sinc}(4f) - 4 \operatorname{sinc}(2f)} \end{aligned}$$

Or in terms of just the sin function, the above becomes

$$\begin{aligned} \mathcal{F}(w(t)) &= 16 \frac{\sin(4\pi f)}{4\pi f} - 4 \frac{\sin(2\pi f)}{2\pi f} \\ &= 4 \frac{\sin(4\pi f)}{\pi f} - 2 \frac{\sin(2\pi f)}{\pi f} \\ &= \boxed{\frac{4 \sin(4\pi f) - 2 \sin(2\pi f)}{\pi f}} \end{aligned}$$

6 Problem 2.18

If $w(t)$ has the Fourier Transform $W(f) = \frac{j2\pi f}{1+j2\pi f}$ find $X(f)$ for the following waveforms

- (a) $x(t) = w(2t + 2)$
- (b) $x(t) = w(t - 1)e^{-jt}$
- (c) $x(t) = w(1 - t)$

Answer:

6.1 Part(a)

$$w(t) \Leftrightarrow \frac{j2\pi f}{1+j2\pi f}$$

Then

$$\begin{aligned} w(2t) &\Leftrightarrow \frac{1}{2}X\left(\frac{f}{2}\right) \\ w(2t + 2) &\Leftrightarrow \frac{1}{2}X\left(\frac{f}{2}\right)e^{j2\pi\frac{f}{2}(2)} \end{aligned}$$

Hence

$$\begin{aligned} w(2t + 2) &\Leftrightarrow \frac{1}{2} \left(\frac{j2\pi\frac{f}{2}}{1+j2\pi\frac{f}{2}} \right) e^{j2\pi f} \\ &\Leftrightarrow \frac{1}{2} \left(\frac{j\pi f}{1+j\pi f} \right) e^{j2\pi f} \end{aligned}$$

This can be simplified to

$$w(2t + 2) \Leftrightarrow \frac{\pi f}{2(\pi f - j)} e^{j2\pi f}$$

6.2 Part(b)

$$w(t) \Leftrightarrow \frac{j2\pi f}{1+j2\pi f}$$

$$w(t-1) \Leftrightarrow X(f) e^{-j2\pi f(-1)}$$

$$\cancel{w(t-1) \Leftrightarrow X(f) \cdot e^{-j2\pi f}}$$

$$w(t-1) \Leftrightarrow \cancel{X(f) e^{j2\pi f}}$$

Now Let $e^{-jt} = e^{-j2\pi f_0 t}$, hence $2\pi f_0 = 1$ or $f_0 = \frac{1}{2\pi}$, then

$$w(t-1) e^{-j2\pi f_0 t} \Leftrightarrow X(f + f_0) e^{j2\pi(f+f_0)}$$

Hence

$$\begin{aligned} w(t-1) e^{-jt} &\Leftrightarrow \frac{j2\pi(f+f_0)}{1+j2\pi(f+f_0)} e^{j2\pi(f+f_0)} = \frac{-j2\pi(f+\frac{1}{2\pi})}{1+j2\pi(f+\frac{1}{2\pi})} \cdot e^{-j2\pi(f+\frac{1}{2\pi})} \\ w(t-1) e^{-jt} &\Leftrightarrow \frac{j2\pi(f+\frac{1}{2\pi})}{1+j2\pi(f+\frac{1}{2\pi})} e^{j2\pi(f+\frac{1}{2\pi})} \\ w(t-1) e^{-jt} &\Leftrightarrow \frac{j2\pi(2\pi f+1)}{2\pi+j2\pi(2\pi f+1)} e^{j(2\pi f+1)} \\ w(t-1) e^{-jt} &\Leftrightarrow \frac{j4\pi^2 f + j2\pi}{2\pi+j4\pi^2 f + j2\pi} e^{j2\pi f} e^j \\ w(t-1) e^{-jt} &\Leftrightarrow \frac{2\pi f+1}{-j+2\pi f+1} e^{j2\pi f} e^j \end{aligned}$$

Hence

$$w(t-1) e^{-jt} \Leftrightarrow \boxed{\frac{2\pi f+1}{-j+2\pi f} e^{j(2\pi f+1)}}$$

6.3 Part(c)

$$w(t) \Leftrightarrow \frac{j2\pi f}{1+j2\pi f}$$

$$w(-t) \Leftrightarrow \cancel{X(-f) e^{-j2\pi f}}$$

$$w(t-1) \Leftrightarrow X(f) e^{-j2\pi f}$$

$$w(-t+1) \Leftrightarrow X(-f) e^{j2\pi f(1)}$$

$$w(1-t) \Leftrightarrow \frac{-j2\pi f}{1-j2\pi f} e^{j2\pi f}$$

Then